


Test Port Adaptors for Vector Network Analyzers (VNA)

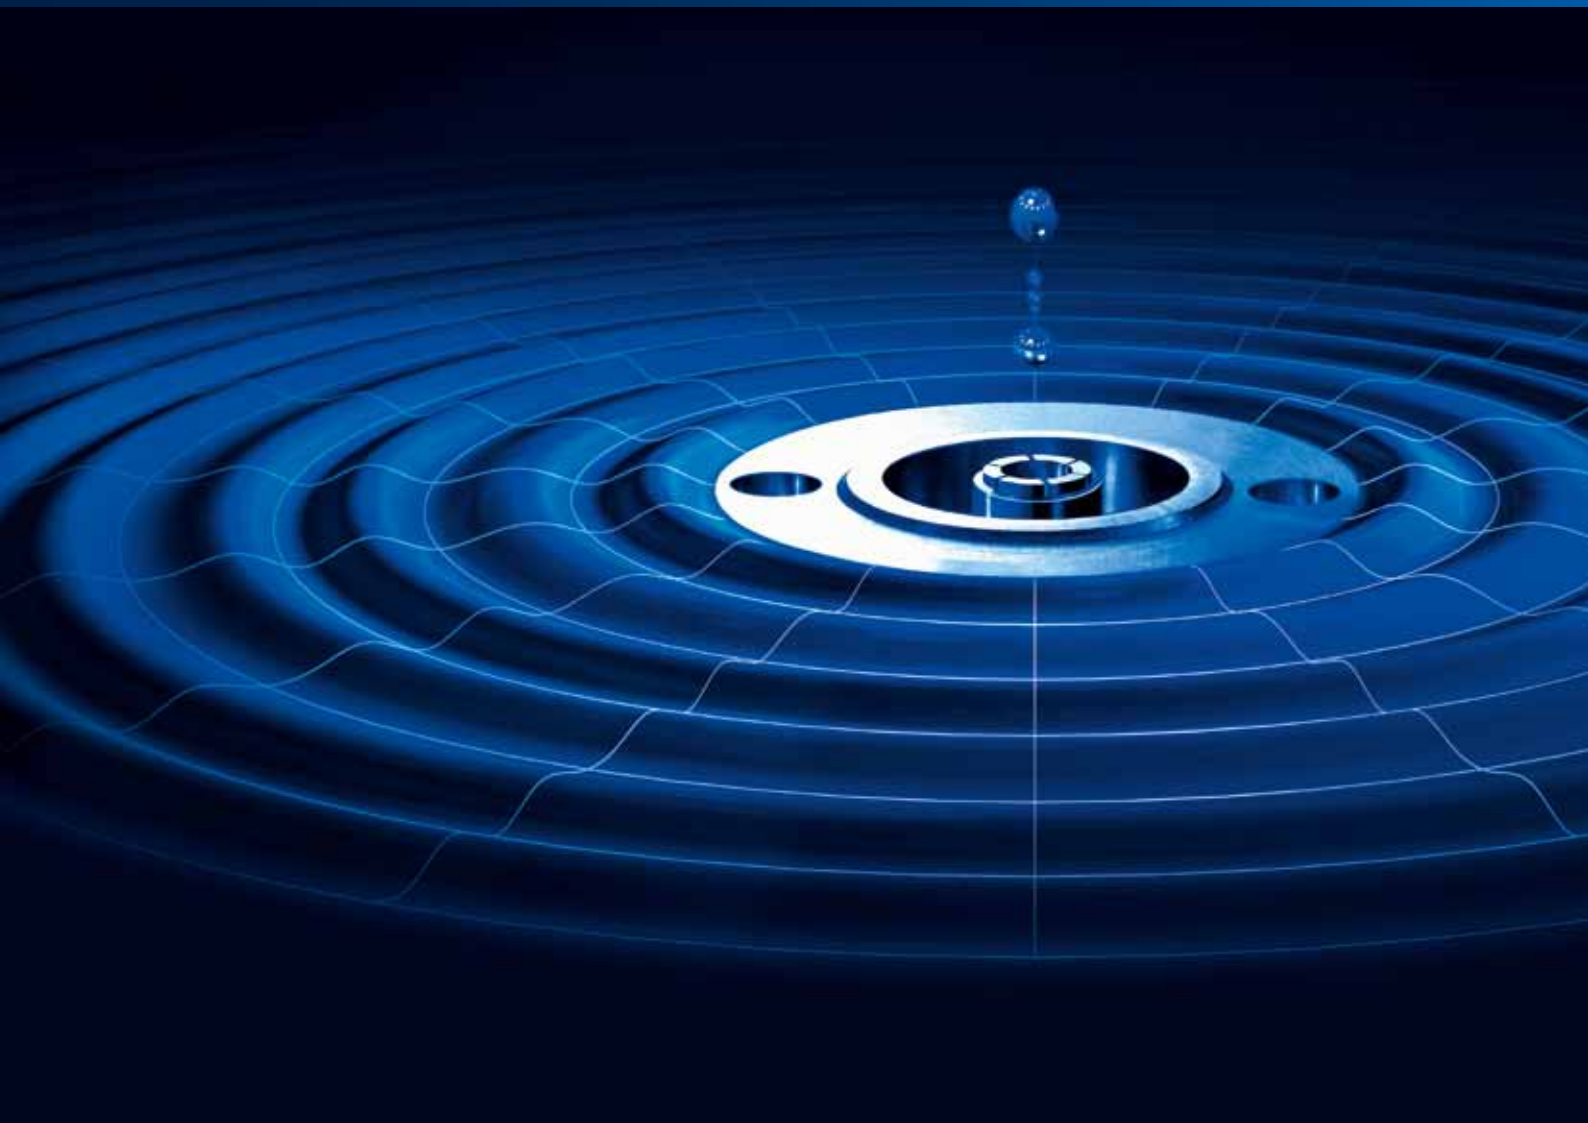

Test Port Adaptors for VNA Applications

Rosenberger offers a wide range of ruggedized test port adaptors for VNA (**V**ector **N**etwork **A**nalizer) test applications. Designed to connect directly with a ruggedized coupling nut to the VNA test port, high-quality test port adaptors from Rosenberger open up a lot of advantages:

- Usable for all common Vector Network Analyzers
- Reliable protection of VNA test ports
- Cost saving by reducing VNA down times, minimizing repair costs
- Excellent measurement performance due to restricted connection dimensions on the adaptor DUT side
- Reliable measurements of the devices (and not of the complete test arrangement)



Products

The spectrum includes RPC-3.50, RPC-2.92, RPC-2.40 and RPC-1.85 adaptors, available as "in series" and "inter series" versions.

- **Female types:**

mateable with all common Vector Network Analyzer test ports and all common standard series

- **Male types:**

mateable with all common standard series, e.g. with ruggedized female connectors and non-ruggedized female connectors



Ordering No.
Info340TestPortFly/2000/09-2012
pA 248541

© 09.2012 **Rosenberger**
Design **Thewald Kommunikation**

Test Port Adaptors

RPC-3.50 Test Port Adaptors

RPC-3.50 test port adaptors – interface to IEC 60169-23 – are intermateable with APC-3.50, GPC-3.50, SMA, K and RPC-2.92 connectors. These test port adaptors operate with frequencies up to 18 GHz or 26.5 GHz. There are "in series" adaptors as well as "inter series" adaptors available – RPC-3.50 to RPC-N and RPC-7.

In Series Adaptors

Ordering Number	Version	Remarks	Return Loss
03KR121-K0AS3	straight	RPC-3.50 female, ruggedized – female	≥ 26 dB, DC to 26.5 GHz
03KR121-S0AS3	straight	RPC-3.50 female, ruggedized – male	≥ 26 dB, DC to 26.5 GHz
03KR121-SR00S3	straight	RPC-3.50 female, ruggedized – male, ruggedized	≥ 26 dB, DC to 26.5 GHz

Inter Series Adaptors

Ordering Number	Version	Remarks	Return Loss
03KR105-K0AS3	straight	RPC-3.50 female, ruggedized – RPC-N female	≥ 26 dB, DC to 18 GHz
03KR105-S0AS3	straight	RPC-3.50 female, ruggedized – RPC-N male	≥ 26 dB, DC to 18 GHz
03KR107-P0AS3	straight	RPC-3.50 female, ruggedized – RPC-7	≥ 28 dB, DC to 18 GHz



RPC-2.92 Test Port Adaptors

RPC-2.92 test port adaptors – interface to IEC 61169-35 – are intermateable with APC-3.50, GPC-3.50, SMA, K and RPC-3.50 connectors. These test port adaptors operate with frequencies up to 18 GHz or 40 GHz. There are "in series" adaptors as well as "inter series" adaptors available – RPC-2.92 to RPC-N and RPC-7.

In Series Adaptors

Ordering Number	Version	Remarks	Return Loss
02KR121-K0AS3	straight	RPC-2.92 female, ruggedized – female	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz
02KR121-S0AS3	straight	RPC-2.92 female, ruggedized – male	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz
02KR121-SR00S3	straight	RPC-2.92 female, ruggedized – male, ruggedized	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 40 GHz

Inter Series Adaptors

Ordering Number	Version	Remarks	Return Loss
02KR105-K0AS3	straight	RPC-2.92 female, ruggedized – RPC-N female	≥ 26 dB, DC to 18 GHz
02KR105-S0AS3	straight	RPC-2.92 female, ruggedized – RPC-N male	≥ 26 dB, DC to 18 GHz
02KR107-P0AS3	straight	RPC-2.92 female, ruggedized – RPC-7	≥ 28 dB, DC to 18 GHz



RPC-2.40 Test Port Adaptors

RPC-2.40 test port adaptors – interface to IEC 61169-40 – are intermateable with APC-2.40, OS 50, HP-2.40 or RPC-1.85 and V connectors. These test port adaptors operate with frequencies up to 18 GHz, 40 GHz or 50 GHz. There are "in series" adaptors as well as "inter series" adaptors available – RPC-2.40 to RPC-N, RPC-7 and RPC-2.92.

In Series Adaptors

Ordering Number	Version	Remarks	Return Loss
09KR121-K0AS3	straight	RPC-2.40 female, ruggedized – female	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 50 GHz
09KR121-S0AS3	straight	RPC-2.40 female, ruggedized – male	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 50 GHz
09KR121-SR00S3	straight	RPC-2.40 female, ruggedized – male, ruggedized	≥ 26 dB, DC to 26.5 GHz ≥ 23 dB, 26.5 GHz to 50 GHz

Inter Series Adaptors

Ordering Number	Version	Remarks	Return Loss
09KR102-K0AS3	straight	RPC-2.40 female, ruggedized – RPC-2.92 female	≥ 26 dB, DC to 18 GHz ≥ 23 dB, 18 GHz to 40 GHz
09KR102-S0AS3	straight	RPC-2.40 female, ruggedized – RPC-2.92 male	≥ 26 dB, DC to 18 GHz ≥ 23 dB, 18 GHz to 40 GHz
09KR105-K0AS3	straight	RPC-2.40 female, ruggedized – RPC-N female	≥ 26 dB, DC to 18 GHz
09KR105-S0AS3	straight	RPC-2.40 female, ruggedized – RPC-N male	≥ 26 dB, DC to 18 GHz
09KR107-P0AS3	straight	RPC-2.40 female, ruggedized – RPC-7	≥ 26 dB, DC to 18 GHz



RPC-1.85 Test Port Adaptors

RPC-1.85 test port adaptors – interface to IEC 61169-32 – are intermateable with V or RPC-2.40, APC-2.40, OS 50 and HP-2.40 connectors. These test port adaptors operate with frequencies up to 70 GHz. Available are "in series" adaptors, types female – female and female – male.

In Series Adaptors

Ordering Number	Version	Remarks	Return Loss
08KR121-K0AS3	straight	RPC-1.85 female, ruggedized – female	≥ 28 dB, DC to 18 GHz ≥ 21 dB, 18 GHz to 50 GHz ≥ 17 dB, 50 GHz to 70 GHz
08KR121-S0AS3	straight	RPC-1.85 female, ruggedized – male	≥ 28 dB, DC to 18 GHz ≥ 21 dB, 18 GHz to 50 GHz ≥ 17 dB, 50 GHz to 70 GHz
08KR121-SR00S3	straight	RPC-1.85 female, ruggedized – male, ruggedized	≥ 28 dB, DC to 18 GHz ≥ 21 dB, 18 GHz to 50 GHz ≥ 17 dB, 50 GHz to 70 GHz



Rosenberger Sales Worldwide

Rosenberger

Hochfrequenztechnik GmbH & Co. KG

P.O.Box 1260

D-84526 Tittmoning

Tel: +49-86 84-18-0

Fax: +49-86 84-18-499

I E-Mail: info@rosenberger.de

I Web: www.rosenberger.com

Germany

Vertriebsbüro München

Rotwandweg 5

D-82024 Taufkirchen

Tel: + 49-89-6 14 17 30

Fax: + 49-89-6 14 09 54

gunter.glatz@rosenberger.de

Vertriebsbüro Nord

WI-tronik

Alfred-Nobel-Straße 9

D-57299 Burbach

Tel: + 49-27 36-44 70 06

Fax: + 49-27 36-44 70 07

info@wi-tronik.de

Europe

Austria, Croatia, Czech Republic, Hungary, Slovakia, Slovenia

Walter Krenn

Hochfrequenztechnik GmbH

Simmeringer Hauptstraße 421

A-1110 Wien

Tel: + 43-1-7 48 71 17-0

Fax: + 43-1-7 48 71 17-90

E-Mail: info@krenn.at

Belgium, Luxembourg, Netherlands

Rosenberger

Hochfrequenztechnik GmbH & Co. KG

Sales Office Benelux

Tel: + 49-86 84-18-0

Fax: + 49-86 84-18-499

E-Mail: info@rosenberger.de

Denmark

Rosenberger Danmark a/s

Blokken 38, Box 92

DK-3460 Birkerød

Tel: + 45-45 82 12 94

Fax: + 45-45 82 13 95

E-Mail: mail@rosenberger.dk

Finland

ETRA Electronics Oy

Lampputie 2

FIN-00740 Helsinki

Tel: + 3 58-2 07 65 16 0

Fax: + 3 58-2 07 65 23 11

E-Mail: electronics@etra.fi

France

Rosenberger France

Actipark

17, Rue des Frères Lumière

F-67201 Eckbolsheim

Tel: + 33-3-90 20 76 00

Fax: + 33-3-90 20 76 01

E-Mail: nathalie.dumontel@rosenberger.de

Italy

Rosenberger Hochfrequenztechnik

GmbH & Co. KG

Sales Office Milano

Via Brodolini, 31

I-20863 Concorezzo - MB

Tel: + 39-039-96 30306

Fax: + 39-039-59 68439

E-Mail: riccardo.santovito@rosenberger.de

Norway

T&G Elektro A/S

Kirkeveien 25 B

N-1363 Hovik

Tel: + 47-67-12 90 50

Fax: + 47-67-12 90 60

E-Mail: post@tgelektro.no

Poland

PTH neopta electronics sp.z.o.o.

Ul. Wlodkowica 14

PL-60-334 Poznan

Tel: + 48-61-6 62 48 51

Fax: + 48-61-6 62 48 52

E-Mail: info@neopta.pl

Russia

CHS Ltd.

Stromynka street 18

Bld. 7

107076, Moscow

Tel: + 7-495-73 90 720

Fax: + 7-495-2 73 90 720

Cell Phone: +7-916-6540839

E-Mail: chs@rosenberger.ru

Spain, Portugal

Rosenberger Telecom, S.A.

Ed Olimpia N18

P.I. Vento del Cano

E-28925 Alarcón / Madrid

Tel: + 34-91-3 52 83 52

Fax: + 34-91-3 52 98 13

E-Mail: rosenberger@epirsa.com

Sweden

Rosenberger Sverige AB

Vallgatan 5B

S-17067 Solna

Tel: + 46-8-6 36 26 00

Fax: + 46-8-6 36 26 26

E-Mail: info@rosenberger.se

Switzerland

EME AG

Interconnection & Motion

Lohwisstrasse 50

CH-8123 Ebmatingen

Tel: + 41-44-982 11 11

Fax: + 41-44-982 11 33

E-Mail: info@eme.ch

Turkey

Norana Dis Ticaret

ve Müessesilik Ltd. Sti.

Atatürk Caddesi 206-1, Derya Apt.

TR-35220 Birinci Kordon, Izmir

Tel: + 90-2 32-4 64 00 11

Fax: + 90-2 32-4 63 06 73

E-Mail: info@norana.com.tr

United Kingdom

Rosenberger Micro-Coax Ltd.

2b Mercury House

Callewa Park, Aldermaston

GB-Berkshire RG7 8PN

Tel: + 44 - 1-18 - 9 81 00 23

Fax: + 44 - 1-18 - 9 81 61 80

E-Mail: sales@rmcoax.com

Africa

Algeria, Morocco, Tunisia

Rosenberger Telecom, S.A.

Ed Olimpia N18

P.I. Vento del Cano

E-28925 Alarcón / Madrid

Tel: + 34-91-3 52 83 52

Fax: + 34-91-3 52 98 13

E-Mail: rosenberger@epirsa.com

South Africa

Actum Electronics

P.O. Box 819

RSA-Rivonia 2128

Unit A8 TheStables Business Park

No 13, 3rd Road Linbro Park 2064

Tel: +27-11-6 08 30 01

Fax: +27-11-6 08 19 18

E-Mail: sales@actum.co.za

South America

Argentina

Mercotel S.R.L.

Viel 2079

RA-1424 Buenos Aires

Tel: + 54 - 11 - 49 21 46 20

Fax: + 54 - 11 - 49 24 59 52

E-Mail: info@mercotel.com.ar

Bolivia

RIBCO LTDA

Ed. Cámara Nacional de Comercio

Of.1002

Av. Mariscal Santa Cruz N° 1392

BO-La Paz

Tel: + 591-2-211 1100

Fax: + 591-2-239 3047

E-Mail: gibatta@entelnet.bo

Brazil

Rosenberger Domex Telecom

Cabletech Avenue, 601

Guaramirim

CEP 12295-230

BR-Cacapava - São Paulo

Tel: + 55-12-3221 8500

Fax: + 55-12-3221 8543

E-Mail: vendas@rosenbergerdomex.com.br

Chile, Latin America

Rosenberger Sudamérica Ltda.

Aldunate 1961,

Santiago 836-1195

Tel: + 56 - 2 - 3 67 11 70

Fax: + 56 - 2 - 3 67 12 78

E-Mail: rosenberger@rosenberger.cl

Colombia

Latinocomm Ltda.

Diagonal 152A 34-11

CO-Bogotá

Tel: + 57-1-274 59 25

Fax: + 57-1-216 13 52

E-Mail: latinocomm@latinocomm.com

Guatemala, Central America

Grupo Ebis

11 Avenida 31-35 Zona 5

GCA- Guatemala, C.A 01005

Tel: + 502 - 2331 - 8700

Fax: + 502 - 2332 - 7999

E-Mail: info@fotusald.com

Peru

LB Forsberg

Islas Virgenes 148

Urb. La Portada de La Planicie,

La Molina

PE-Lima 12

Tel: + 51-1-9977 5982

Fax: + 51-1-368 1989

E-Mail: forsberg1@terra.com.pe

Venezuela

Total Stock

Centro Profesional La Urbina - P.B.

Local A - Calle 3-A

Urbanizacion La Urbina

YV-Caracas

Tel: + 58-212-241 6993

Fax: + 58-212-242 3894

E-Mail: totalstock@movistar.net.ve

North America

USA, Canada

Rosenberger of North America, LLC.

309 Colonial Drive

P.O. Box 309

USA-Akron, PA 17501

Tel: + 1-717-859 8900

Fax: + 1-717-859 7044

E-Mail: info@rosenbergerna.com

Rosenberger CDS, LLC.

1100 Professional, Suite 100

USA-Plano, TX 75074

Tel: + 1-972-423 8991 0

E-Mail: info@rosenbergercds.com

E-Mail: sales@rosenbergercds.com

Asia

China, Asia, Australia

Rosenberger

Asia Pacific Electronic Co., Ltd.

No. 3, Anxiang Road, Block B

Tianzhu Airport Industrial Zone

Beijing 101300

PR China

Tel: + 86-10-80 48 19 95

Fax: + 86-10-80 48 24 38

E-Mail: info@rosenberger.com.cn

India

Rosenberger Electronic Co. (India) Pvt

Limited

Plot No. 263, Sector 6

IMT Manesar, Gurgaon

Haryana-122050

Tel: + 91 - 124 - 477 55 00

Fax: + 91 - 124 - 477 55 01

E-Mail: info@rosenberger.in

Israel

M.T.I. Engineering Ltd.

Afek Industrial Park

11 Hamelacha St.

IL-48091 Rosh Ha'ayin

Tel: + 9 72-3-9 00 89 00

Fax: + 9 72-3-9 00 89 02

E-Mail: info@mti-group.co.il

Japan

Fusoh Shoji Co., Ltd.

No. 10-2, 2-Chome

Nagata-Cho, Chiyoda-Ku

J-Tokyo 100-0014

Tel: + 81-3-35 81 90 56

Fax: + 81-3-35 81 57 09

E-Mail: inq@fusoh.co.jp

Korea South, Sales Automotive

Dream Holdings Co. Ltd.

977-1, Gosaek-dong, Gwonseon-gu,

Suwon-si

Gyeonggi-do

Korea (South) (441-813)

Tel: + 82 - 31 - 243 - 1767

Fax: + 82 - 31 -