

DP0919K1206AT Specification


Date: 10/20/14

1. RF Specification


DP0919K1206AT	RF Spec.	
Characteristics Impedance	50 ohms	
Frequency Range	824-894 MHz	1850-1990 MHz
Insertion Loss (max.)	0.75dB	0.55dB
Attenuation (min.)	-20dB @ 1850-1990MHz	-20dB@ 824-894 MHz
VSWR	1.7 max.	

DP0919K1206AT Specification

2. Mechanical Specification



PIN	Connection	PIN	Connection
P1	GND	P4	High Band Port
P2	Common Port	P5	GND
P3	GND	P6	Low Band Port

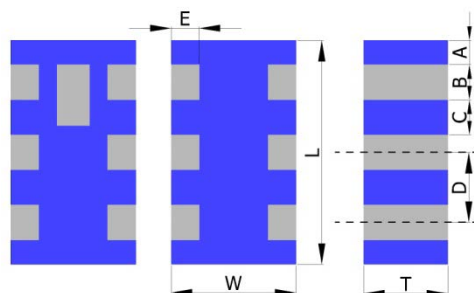

Symbol	Dimension (mm)
L	3.20 ± 0.15
W	1.60 ± 0.15
T	0.86 ± 0.10
A	0.35 ± 0.15
B	0.55 ± 0.15
C	0.40 ± 0.15
D	1.0 ± 0.1
E	0.25 ± 0.15

DP0919K1206AT Specification

3. Simulation Data

