




MONO-BLOCK PRELIMINARY SPECIFICATION

PART NO : MBR23R5800S150PA

1. Electrical Specifications.

NO	ITEM	Min.	Avg.	Max.	Unit
1	Frequency Range (BW)	5725	5800	5875	MHz
2	Insertion Loss in BW		2.5	3.0	dB
3	Ripple in BW		0.5	1.0	dB
4	V.S.W.R		1.5	2.0	
5	In/Out Impedance		50		Ω
6	Input Power			1	W
7	Attenuation (Absolute Value)	20 dB min. at 5425 MHz			
		10 dB min. at 6175 MHz			
8	Operation Temperature Range	-30°C ~ +85°C			
9	Test Jig				
10	Quantity				

2. Dimensions.

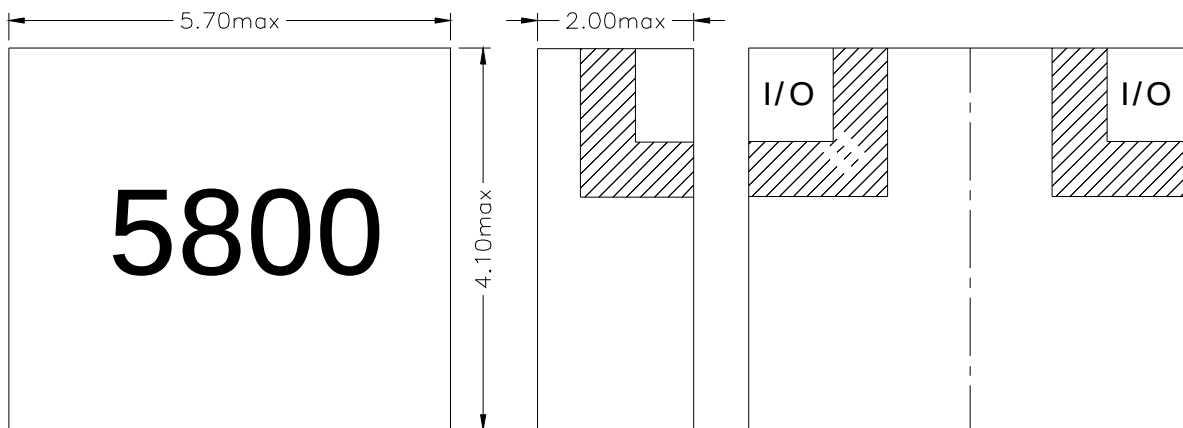

Tolerance Unless
Otherwise Specified: ± 0.15
Unit: mm