



MONO-BLOCK Preliminary Specification

CUSTOMER : RFMW LTD
PART NO : MBP33R881S25B
DATE : 2001. 03. 19.


WRITTEN BY	CHECKED BY	APPROVAL

1. ELECTRICAL SPEC.

NO	ITEM	Min.	Avg.	Max.	Unit
1	Frequency Range (BW)	869	881.5	894	MHz
2	Insertion Loss in BW		2.5	3.0	dB
3	Ripple in BW		0.5	1.0	dB
4	V.S.W.R		1.5	2.0	
5	In/Out Impedance		50		Ω
6	Input Power				W
7	Attenuation (Absolute Value)	at 824 ~ 849 MHz 15 dB min.			
		at 914 ~ 939 MHz 12 dB min.			
8	Operation Temperature Range	-30 ~ +85°C			
9	Test Jig				
10	Quantity				

★ MURATA Part Number : DFC3R881P025HHD

2. DIMENSIONS

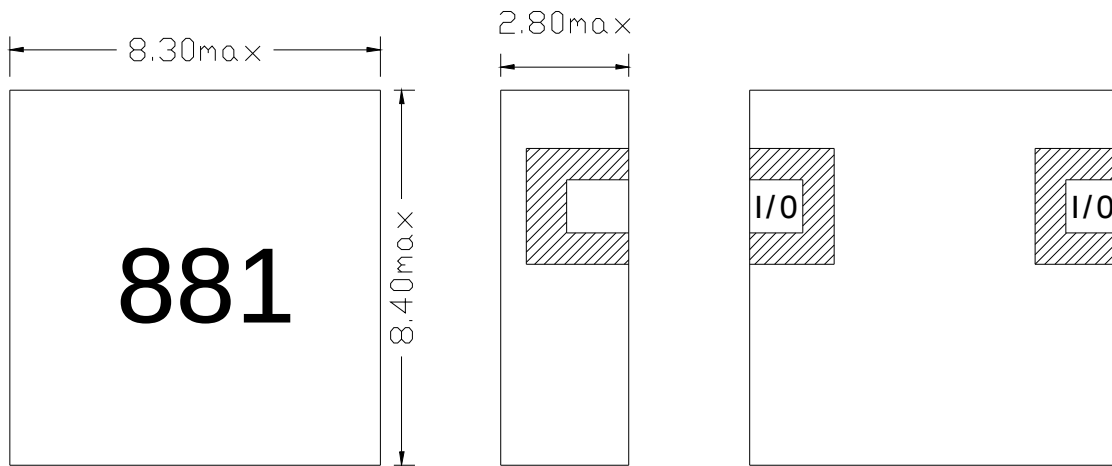

Tolerance Unless
Otherwise Specified: ± 0.15
Unit:mm

R&D 1.

KOREA SANGSHIN ELECTRIC CO., LTD

www.koreasangshin.com